

# MF 423-4-2D-BS SERIES




## Features

- Chassis Mount/Panel 3 Phase Filter 4 Wire
- Three Wire + Neutral
- Dual Stage Filter
- Light Weight
- Compact Mounting
- Book Shelf Design
- Panel Mount
- High Performance
- Shock Proof Terminals

## Technical Specification

- Maximum Operating Voltage: 440/520\*/600\* VAC
- Operating Frequency: 50/60Hz
- Rated Current: 7A to 150A
- High Potential test voltage:  
L to G 2120VAC FOR 250V  
L to L 1414VDC FOR 250V
- Overload Capability: 6 x Rated current for 8sec
- Temperature Range :-25 °C to 85 °C
- Earth Leakage Current : 1 mA max  
(Also available in low leakage Current)

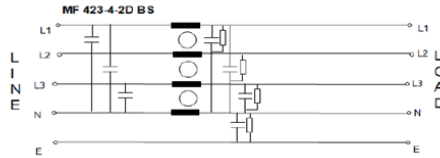

## Application

- For UPS, Special purpose machines.
- SMPS
- Elevators
- CNC Machines
- HVAC
- AC/DC Drives
- SCR Drives

## Presentation

Aluminium

## Mounting

Panel Mount


## Termination

Shock Proof Terminals

## How to Order

Part No	Rated Current	Case	Termination
MF423-4-2D-BS-07	7A	BS -7A	Shock Proof Connector
MF423-4-2D-BS-16	16A	BS-16A	Shock Proof Connector
MF423-4-2D-BS-30	30A	BS-32A	Shock Proof Connector
MF423-4-2D-BS-42	42A	BS-42A	Shock Proof Connector
MF423-4-2D-BS-55	55A	BS-55A	Shock Proof Connector
MF423-4-2D-BS-75	75A	BS-75A	Shock Proof Connector
MF423-4-2D-BS-100	100A	BS-100A	Shock Proof Connector
MF423-4-2D-BS-125	120A	BS-120A	Shock Proof Connector
MF423-4-2D-BS-150	150A	BS-150A	Shock Proof Connector

## Insertion Loss

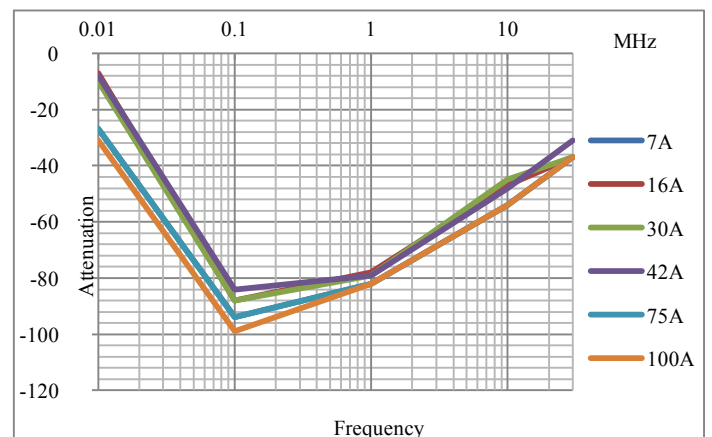

\*\* For Customised filter Contact our sales department